


# Balder CinemaScope

The cornerstone of home cinema systems designed to deliver outstanding experiences in the world's finest homes.

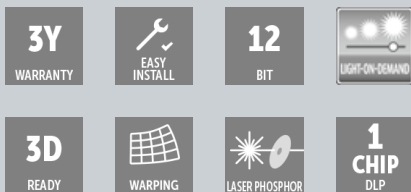

- Theater & Media Room Series
- 5K UHD Resolution (5,120 x 2,160)
- Laser Phosphor
- Up to 5,600 ANSI Lumens

Balder CinemaScope fuses together the world's finest optical components with the imaging device technology chosen by 8 out of 10 professional cinemas, DLP, our unique PULSE electronics platform and inhouse designed laser engine.

### Professional grade optics

By basing Balder's cinemascoppe optical engine on it's bigger brother Loki CinemaScope's architecture, custom designed aspherical glass elements and enhanced low dispersion glass lenses, image quality is in a class of its own. To top that, Balder CinemaScope's frame and core is built in aluminium, 37kg of pure quality. The result is the best picture quality ever shown at this level.

### State of the art electronics

All new "Pulse" electronics have been designed to process 4K with HDMI 2.0a and HDCP 2.2 and the optical engine is utilising the very latest 0.9" DMD DLP chipset, delivering 5,120 x 2,160 pixels on screen.

### CinemaScope

The Balder CinemaScope has a unique automatic aspect ratio detection function. It will look for cinemascoppe content and automatically scale the image to fit the 5,120 x 2,160 resolution and change back to 16:9 (3,840 x 2,160) if you have content in that format. It will also change aspect ratio when a cinemascoppe format movie has a menu outside the active picture frame. Alternatively, you can switch manually between the different formats.

### Liquid cooling

Balder CinemaScope has departed from a pure fan based cooling system to a liquid cooling PID regulation system, allowing Balder to operate in any angle.

**PRODUCT SPECIFICATIONS****BALDER CINEMASCOPE**

Projector type	Single chip DLP
Technology	0.9" DMD™
Resolution	5,120 x 2,160 (5K UHD)
Aspect ratio	2.37:1 (CinemaScope)
Light source	Laser phosphor
Light source lifetime	20,000 - 60,000 hours (depending on brightness mode)
Light output	DCI (P3) Color Wheel: Up to 3,600 ANSI lumens T Color Wheel: Up to 4,000 ANSI lumens M Color Wheel: Up to 5,600 ANSI lumens
CLO (constant light output)	Yes
Contrast ratio	1,800:1 Sequential 450:1 ANSI
Brightness uniformity	90%
Lens range	EN68 (0.30:1) EN47 (0.65:1) EN66 (0.80 - 1.21:1) EN63 (1.20 - 1.70:1) EN61 (1.70 - 2.50:1) EN44 (2.50 - 4.60:1)
Optical lens shift	Up to 122% vertical lens shift & up to 36% horizontal lens shift (depending on lens selection) Motorized zoom, focus, iris, shutter and lens shift (depending on lens selection) Visit the Barco Residential Lens Calculator for further information
Optical dower	Yes
Color correction	P7 RealColor™
Color gamut	DCI (P3) Color Wheel: DCI P3 T Color Wheel: REC.709 M Color Wheel: REC.709
Image processing	Embedded warp, bow correction & blend engine
WARP	Four corner warp
Orientation	360° rotation, no restrictions
Network connection	10/100 Ethernet via RJ45 connection
Integrated web server	Yes
HDR	HDR10
3D	Active stereoscopic 3D* (requires firmware release 1.5 onwards) Additional hardware required please contact an authorized Barco representative for details
Inputs	1 x HDMI 2.0a (HDCP 2.2), 1 x HDBaseT (HDCP 1.4), 2 x dual link DVI-D, 2 x Display Port, HDSDI 1 x RJ45 Ethernet, RS232, 3 x USB, DMX in/out*
Input resolutions	VGA up to 4K UHD (3,840 x 2,160) @ 60Hz Up to 2,560 x 1,600 @ 120Hz
Control	IR, RS232, TCP/IP, 3 x 12v Trigger* (requires firmware release 1.6 onwards) Driver modules available for: Crestron, Control4 and Savant
Power requirements	100 -240V / 50 -60Hz
Power consumption	1,100 W Max.
Noise level (typical at 25°C/77°F)	36 dB(A)
Operating temperature	10 to 45 °C (sea level)
Operational humidity	20 to 80% (relative humidity)
BTU per hour	Max. 4,000 BTU/h

**PRODUCT SPECIFICATIONS****BALDER CINEMASCOPE**

<b>Airflow requirements</b>	Air Inlet (from Rear w/Feet Down): Right Side Exhaust (from Rear w/Feet Down): Rear Clearance Distances (Front / Left / Right / Rear): 1cm / 1cm / 50cm / 100cm
<b>Exhaust airflow</b>	112 ft <sup>3</sup> /min @ 25 °C
<b>Dimensions (WxLxH)</b>	475 x 593 x 286 mm (excluding lens) 18.7 x 23.3 x 11.2 in. (excluding lens)
<b>Weight</b>	37 kg / 81.5 lbs (excluding lens)
<b>Shipping Dimensions</b>	730 x 600 x 480 mm (excluding lens - packaged separately) 28.7 x 23.7 x 18.9 in. (excluding lens - packaged separately)
<b>Shipping weight</b>	43 kg / 94.8 lbs (excluding lens - packaged separately)
<b>Storage temperature</b>	-20 to 60 °C
<b>Storage humidity</b>	10 to 90% (relative humidity)
<b>Standard accessories</b>	Power cord(s), wireless remote control
<b>Certifications</b>	CE, FCC Class A and cCSAus
<b>Warranty</b>	Limited 3 years parts and labor Extendable up to 5 years
<b>*</b>	Firmware upgradable Please contact an authorized Barco representative for details

Last updated: 02 Mar 2020

Technical specifications are subject to change without prior notice. Please check [www.barco.com](http://www.barco.com) for the latest information.