

Physical Specification



The TYPE. MLF represents the ultimate choice for high-output audiophile reproduction in private clubs, yachts and high-end residences.


It's fully active construction with power modules incorporated into the plinth, allow for flexible placement and easy setup.

It's premium build quality and striking aesthetic sit perfectly within design-led environments. With endless customisable aesthetic options.

Like it's TPI stablemates, the TYPE. MLF incorporates advanced composite construction, with patented driver and crossover systems, to give you world-class performance.

Every TPI loudspeaker is tested and certified at the end of it's production in our anechoic chamber, to ensure it meets the required stringent-performance-criteria.

Every TPI product is designed and assembled at our workshops in England to military specifications, thus ensuring a lifetime of unparalleled performance and reliability.

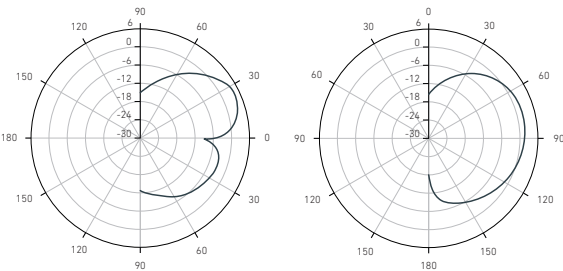

Polar Response (2kHz Sine Reference)

Frequency Response (±3dB) ☐ 28Hz - 22kHz freestanding

Power Rating (Full Range Box) ☐ 700 Watts AES 1200 Watts Peak

Power Rating (Subwoofer\*) ☐ 1,200 Watts AES 2,000 Watts Peak

Sensitivity ☐ 98dB SPL . 1 Watt @ 1MTR

Horizontal Dispersion ☐ 100° (averaged 200-12kHz)

Vertical Dispersion Angle ☐ 30° (averaged 200-12kHz)

Crossover Frequencies ☐ 6kHz (HF) / 6kHz-250Hz (Mid) / 250Hz-80Hz (Bass) / 80Hz (Sub)

High Frequency Transducer ☐ 1 x 1.4" Hybrid Compression Driver

Midrange Transducers ☐ 2 x 8" Linear Paper Cone

Bass Transducer ☐ 1 x 15" Linear Paper Cone

Subwoofer Transducers ☐ 2 x 15" Long Excursion Linear Paper Drive Cone

Enclosure Material ☐ Finnish Birch Plywood / Carbon Fibre Composite

Finish ☐ Natural Oiled or Textured Polyurethane Protection (Custom RAL Colours Upon Request)

Input Connector ☐ 1 x Neutrik 32A Powercon 1 x Neutrik 3 Pole XLR 1 x Ethercon RJ45 (Interconnectivity NL4/NL8)

Dimensions (HxWxD) ☐ 1905mm x 759mm x 827mm (75" x 29.88" x 32.56")

Weight ☐ 147kg (324.08lbs)

Optional Accessories ☐ Flying Kit, Castor Set, Padded Luggage Set

\*MLF top box used unfiltered full range without subwoofers: 60Hz - 22kHz

Measurements

